

# Safety Coupling I Series SKY for indirect drives

- /// with conical clamping hub // with integral ball bearing
- /// for high axial and lateral loads // excellent run-out accuracy
- /// alternative in corrosion-resistant design

## technical data:


SKY size	setting range		moment of inertia [10 <sup>-3</sup> kgm <sup>2</sup> ]	mass approx. [kg]	tightening torque of screws 6x i [Nm]		max. lateral load F <sub>R</sub> [N]	bore diameters ØD		
	disengagement torque	T <sub>KA</sub> [Nm]			6x i	prebored		min	max	
1	0,5	-	0,028	0,17	M 3 - ISO 4762	[1,5]	2550	-	5	12
2	1	-								
6	2	-	0,08	0,30	M 3 - ISO 4762	- [1,5]	5.000	-	5	12
12	6	-								
15	8	-	0,31	0,65	M 4 - ISO 4762	- [3]	8.000	8	9	17
30	13	-							9	17
45	22	-							10	17
60	25	-	0,95	1,3	M 6 - ISO 4017	- [12]	9.500	11	12	24
100	40	-							12	24
150	60	-							14	24
230	80	-	3,8	2,9	M 6 - ISO 4017	- [12]	23.000	17	18	35
330	130	-							22	35
500	200	-	10	5,1	M 8 - ISO 4017	- [30]	30.000	25	28	42
800	350	-							30	42
1000	500	-	53	14	M12 - ISO 4017	- [90]	50.000	38	40	65
2000	800	-							42	65
3000	1500	-	160	26	10xM12 - ISO 4017	- [115]	65.000	49	50	80(120)**
6000	3000	-							50	80(120)**
9000	6000	-							70	80(120)**

### material:

heat-treated steel

temperature range:

-30°C up to +200°C

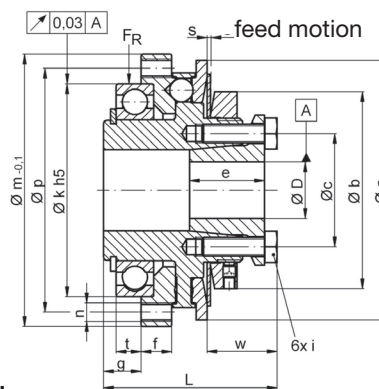

Dimensions [mm]: length dimensions according to DIN ISO 2768 cH

SKY	Øa	(Øa*)	Øb	Øc	e	f	g	Øk <sup>h5</sup>	Øm	Øp	L	n	s	t	w
1/2	43	-	33	19	15	6	6,5	30	40	35	33	6xM3	0,8	4	13,7
6/12	48	(42)*	33	19	15	8	9,8	42	52	47	39	6xM3	0,9	7	13,8
15/30/45	66	(60)*	45	27	18	9	11,5	55	69	62	47,5	6xM4	1,2	8	18,1
60/100/150	83	(76)*	63	36,2	24	9	12	68	87	78	55,5	6xM6	1,6	8	22,4
230/330	109	(104)*	84	50	27	14	16,5	90	113	102	70	6xM8	1,8	12	24
500/800	132	-	105	62	32	15	17	110	136	124	84	8xM8	2,5	12	33,4
1000/2000	185	-	168	90	45	16	28	140	181	165	130	12xM10	3,7	21,5	64
3000-9000	236	-	197	110	53	18/14	22	180	243	200/225	137	12xM10	3,0	14	62

\*note: smaller outer diameters of the shift disc are possible (see values in brackets)

\*\* sizes 3000-9000 with shrink disc for bigger bore diameters up to Ø120

order example: SKY 60 - D = 22<sup>G6</sup> - T<sub>KA</sub> = 40 Nm  
 SKY 150 - corrosion resistant - D = 22<sup>G6</sup> - T<sub>KA</sub> = 120 Nm